
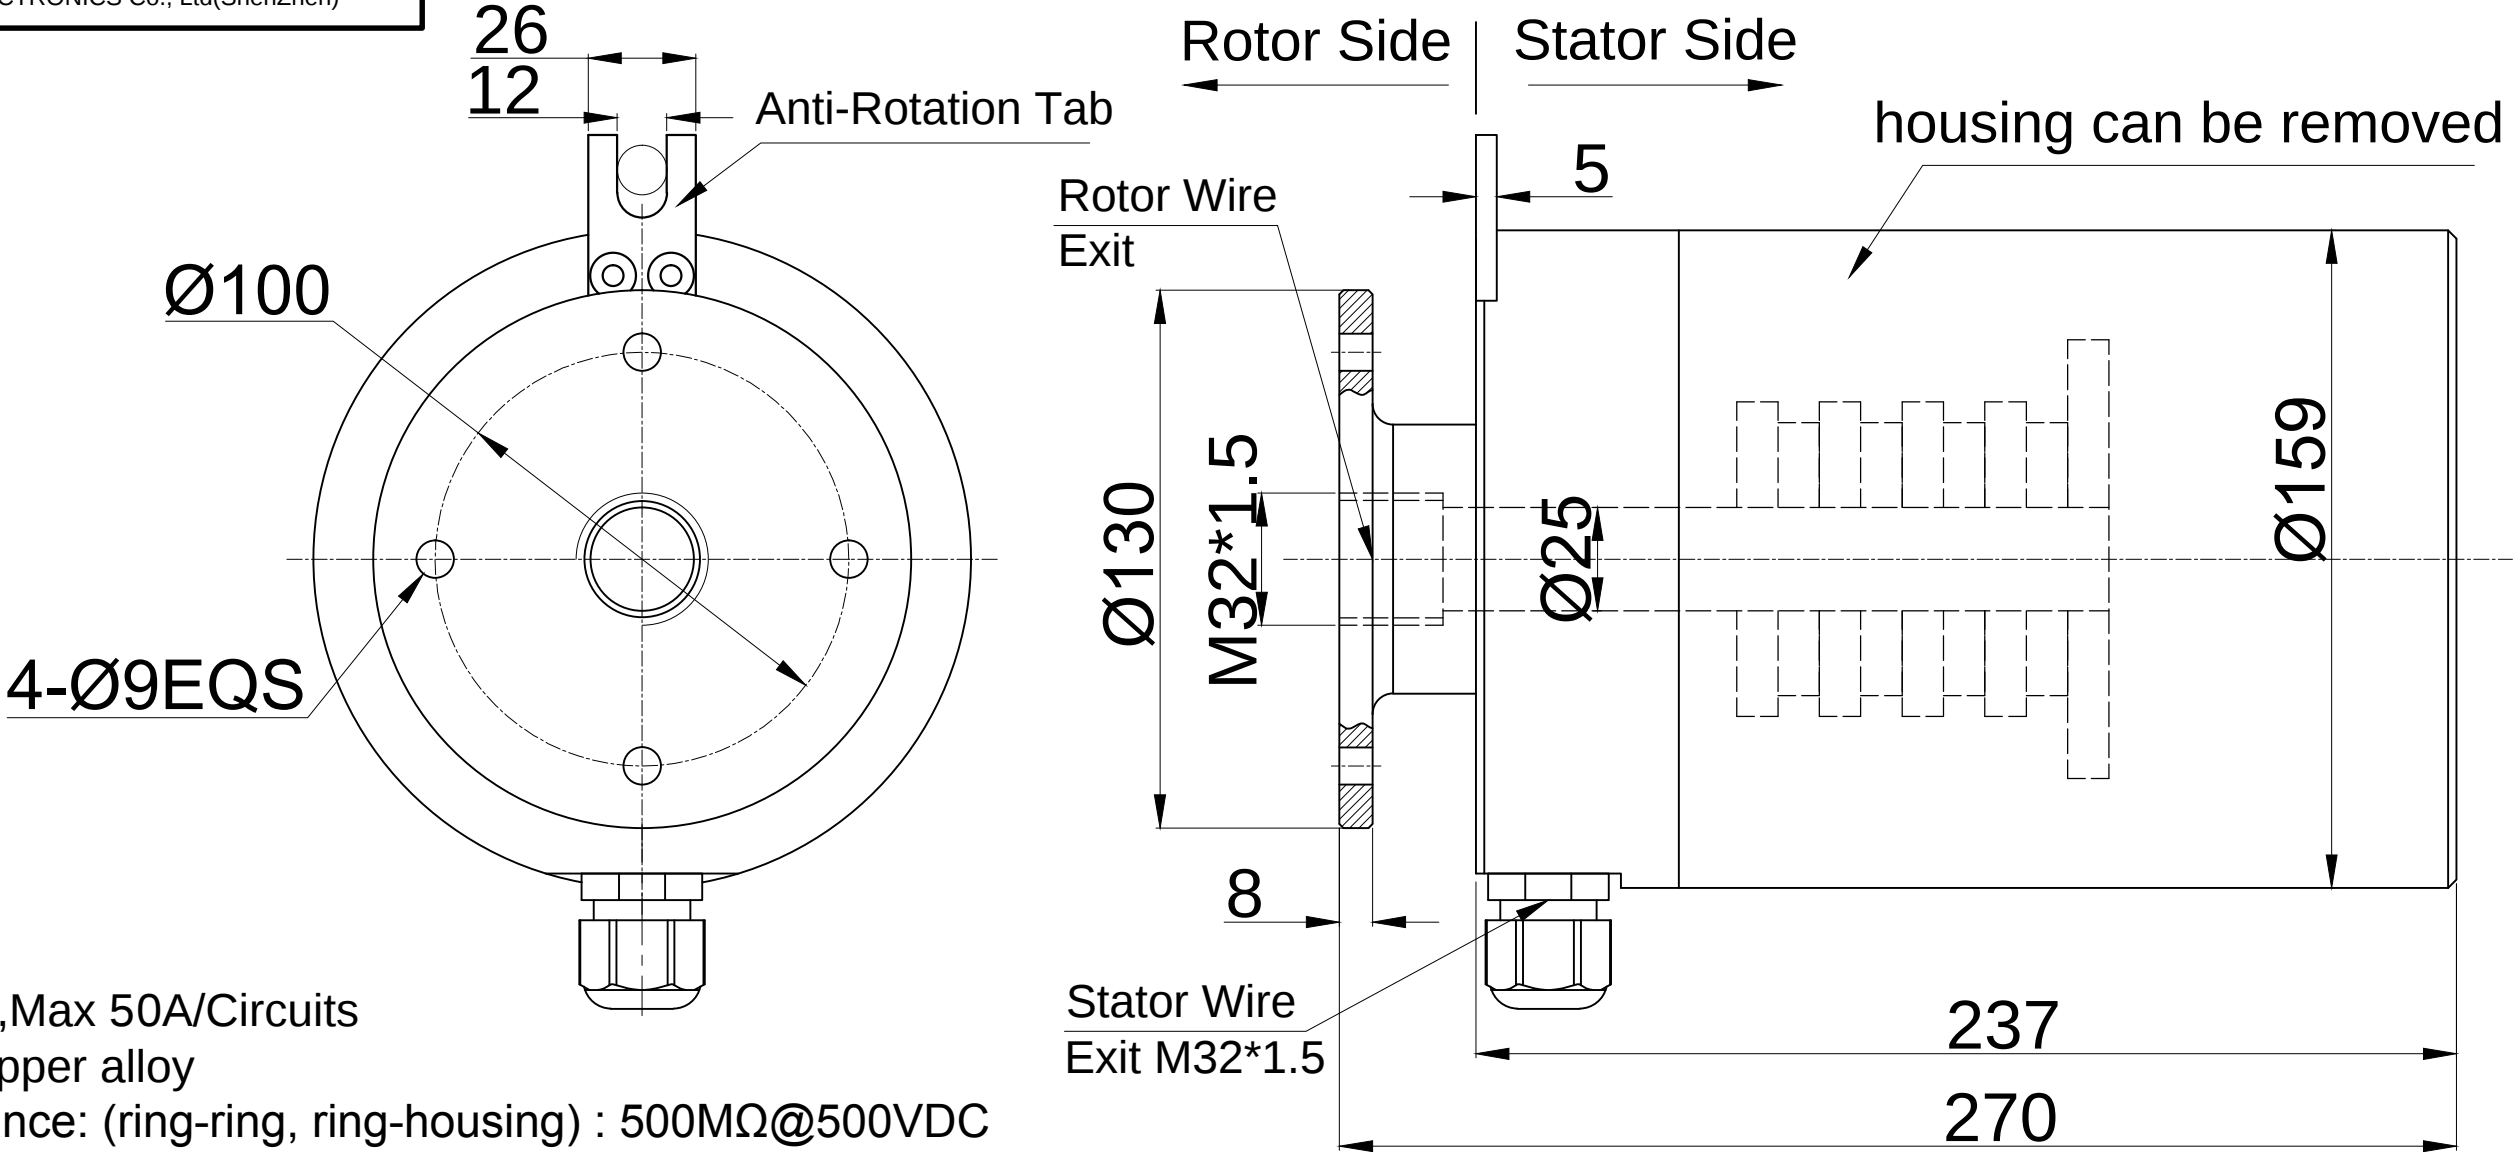


THIS DOCUMENT IS THE PROPERTY OF SENRING ELECTRONICS (SHENZHEN) LTD. (HEREAFTER "SENRING"). IT IS LENT AND IS TO BE RETURNED UPON REQUEST. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO SENRING.THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON COPIED OR PUBLISHED WITHOUT SENRING PRIOR WRITTEN CONSENT.
COPY RIGHT @ 2015 SENRING ELECTRONICS Co., Ltd(ShenZhen)

REV	LOC'T	DESCRIPTION OF CHANGE	CH'G BY	APP BY	DATE



- 1.Circuits: 4 circuits,Max 50A/Circuits
- 2.Ring Material: Copper alloy
- 3.Insulation Resistance: (ring-ring, ring-housing) : 500M Ω @500VDC
(Temperature 25 $^{\circ}$ C $\pm$ 5 $^{\circ}$ C , Relative Humidity<85%)
- 4.Dielectric Strength: (ring-ring, ring-housing) : 500V@50Hz,60s,no breakdown
(Temperature 25 $\pm$ 5 , Relative Humidity<85%)
- 5.Electric Noise: static<0.005 Ω , dynamic<0.01 Ω (conditions: Temperature 25 $\pm$ 5 , Relative Humidity<85%,<10m Ω @6VDC,50mA,@5rpm)
- 6.Contact Material: Carbon brush
- 7.Rating Voltage: 380V
- 8.Working Temperature: -40 $^{\circ}$ C ~ + 80 $^{\circ}$ C
- 9.Working Speed: 0-150/rpm
- 10.Housing Material: Aluminum Alloy
- 11.IP Grade: IP66

4 Circuits 50A * Slipring				TITLE	Outline	UNIT	mm
DESIGN		DATE	15.10.15	MODEL	SNH-0450FS-1692	SCALE	1:1
CHECKED		DATE		 SenRing Electronics			
PROJ.		REV.	A / 0				