
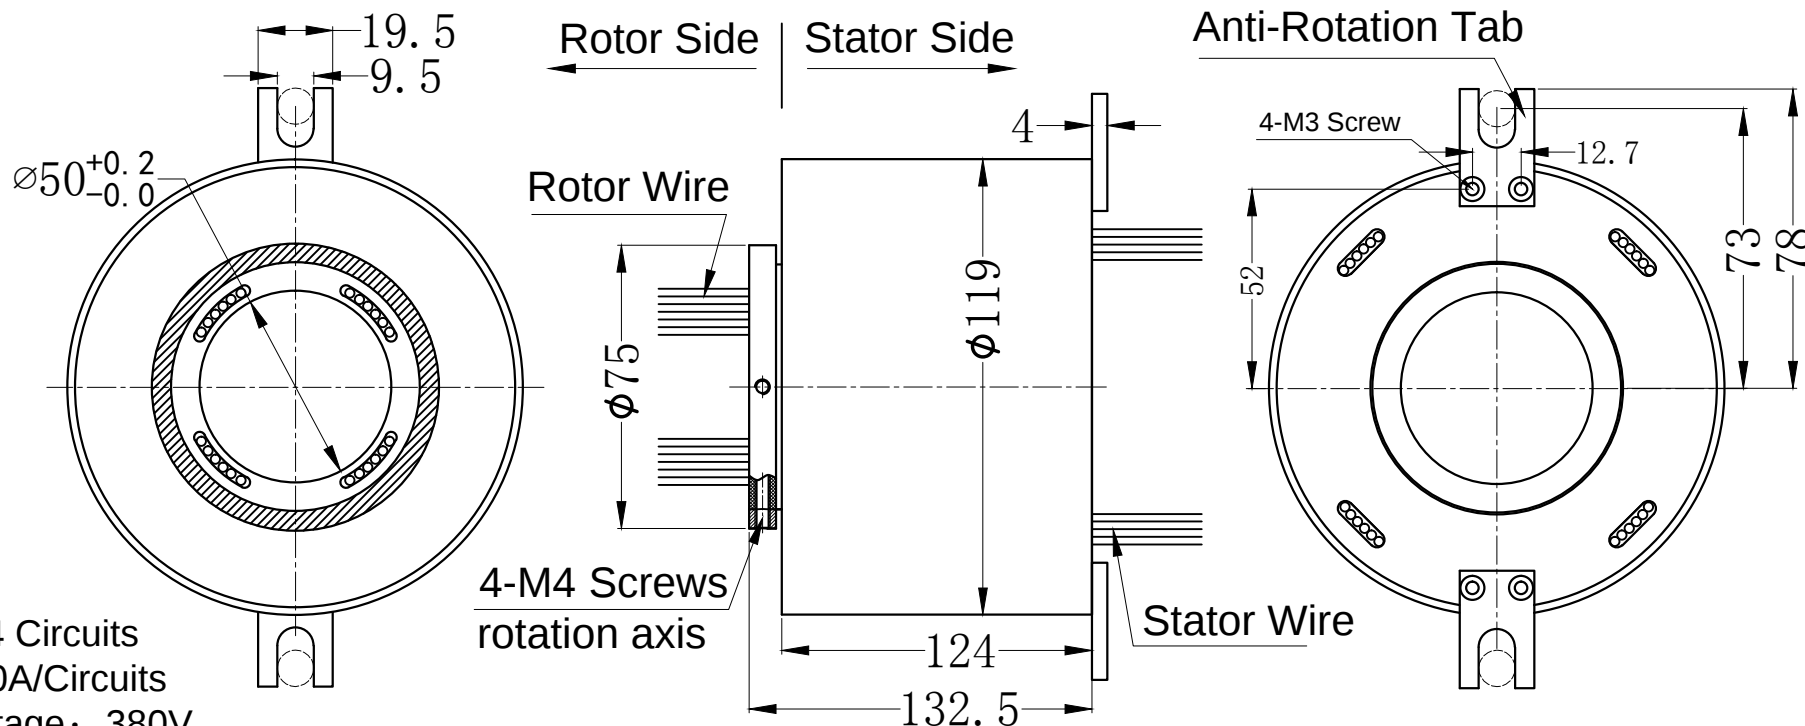


REV	LOC'T	DESCRIPTION OF CHANGE	CH'G BY	APP BY	DATE



- 1.Circuits: 24 Circuits
- 2.Current: 10A/Circuits
- 3.Rating Voltage: 380V
- 4.Dielectric Strength: 500V@50Hz 60s
- 5.Insulation Resistance:500MΩ@500VDC
- 6.Electric Noise: <0.01Ω
- 7.Wire Specifications: AWG17# Teflon wire
- 8.Wire length: Rotor and Stator 300 mm
- 9.Contacting Material: Precious Metal
- 10.Working Speed: 0--250rpm
- 11.IP Grade: IP51
- 12.Working Temperature: -40℃ + 80℃
- 13.Housing Material: Aluminum Alloy

24 Circuits * Slipring				TITLE	Outline	UNIT	mm
DESIGN		DATE	15.9.8	MODEL	SNH050-2410	SCALE	1:1
CHECKED		DATE		 SenRing Electronics			
PROJ.		REV.	A / 0				