





THIS DOCUMENT IS THE PROPERTY OF SENRING ELECTRONICS (SHENZHEN) LTD. (HEREAFTER "SENRING"). IT IS LENT AND IS TO BE RETURNED UPON REQUEST. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO SENRING. THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON COPIED OR PUBLISHED WITHOUT SENRING PRIOR WRITTEN CONSENT.
COPY RIGHT © 2016 SENRING ELECTRONICS Co., Ltd(ShenZhen)

REV	LOC'T	DESCRIPTION OF CHANGE	CH'G BY	APP BY	DATE

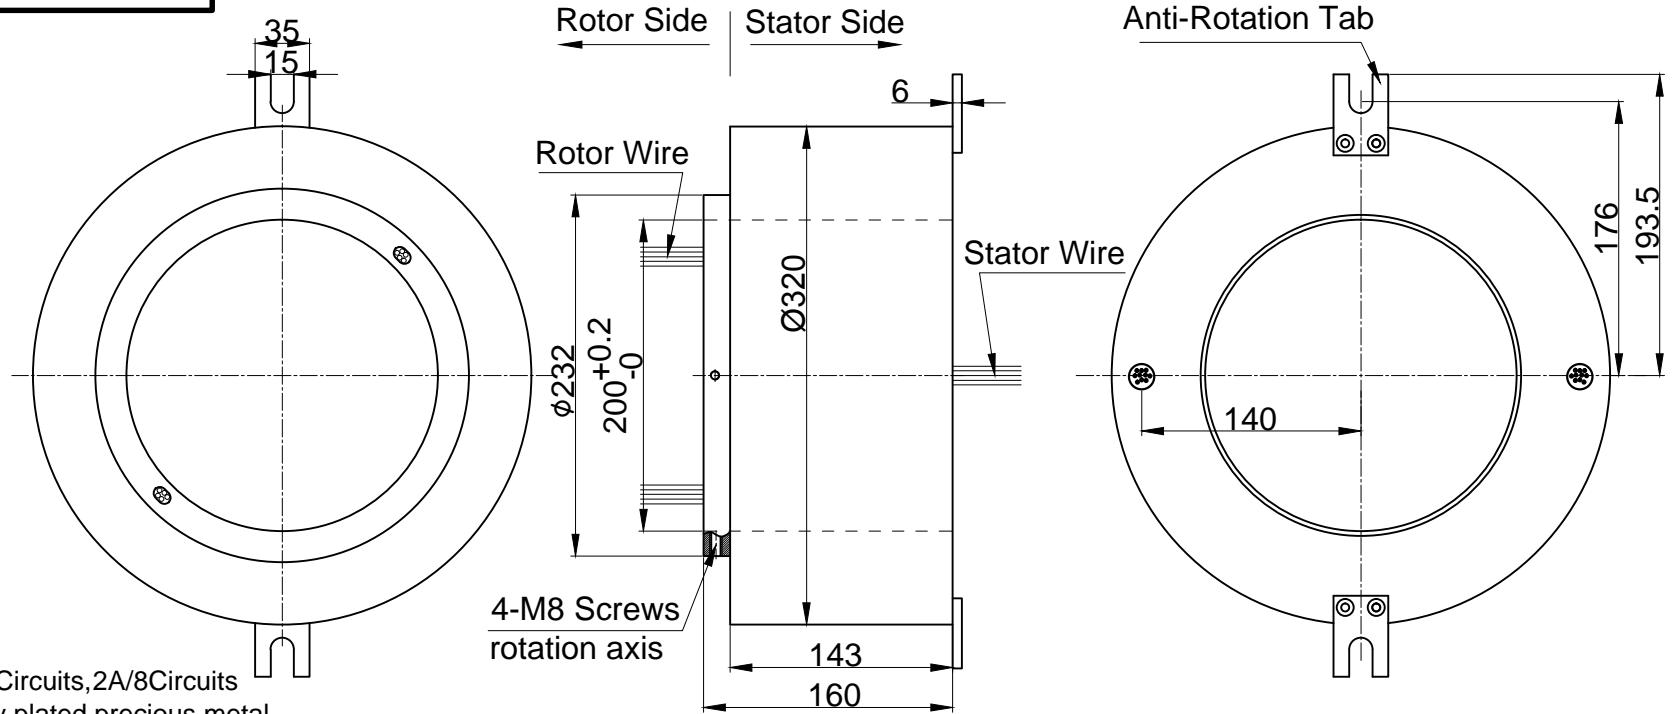

- 1.Circuits: 12 circuits, 10A/4Circuits,2A/8Circuits
- 2.Ring Material: Copper alloy plated precious metal
Ag 5um,Ra<0.4
- 3.Insulation Resistance: (ring-ring, ring-housing) : 500MΩ@500VDC
(Temperature 25 °C±5°C, Relative Humidity<85%)
- 4.Dielectric Strength: (ring-ring, ring-housing) : 500V@50Hz,60s,no breakdown
(Temperature 25 ±5 , Relative Humidity<85%)
- 5.Electric Noise: static<0.005Ω, dynamic<0.01Ω (conditions: Temperature 25 ±5 , Relative Humidity<85%,<10mΩ@6VDC,50mA,@5rpm)
- 6.Contact Material: Precious Metal
- 7.Rating Voltage: 380V
- 8.Working Temperature: +15°C ~ + 25°C
- 9.Working Speed: 0-150/rpm
- 10.Wire Specifications: AWG14# teflon wire
RVSP8*0.2mm² Shielded wire
- 11.Wire Length: Rotor and Stator 300 mm
- 12.Housing Material: Aluminum Alloy
- 13.IP Grade: IP54

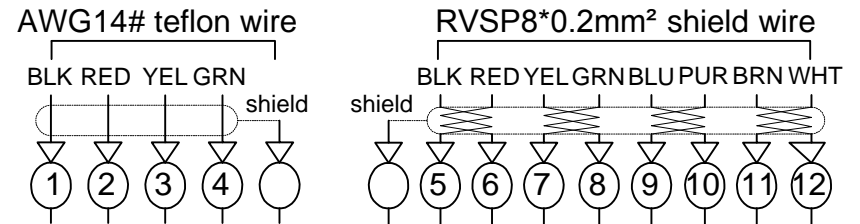

12 Circuits * Slipring				TITLE	Outline	UNIT	mm
DESIGN		DATE		MODEL	SNZ200-0410-08S	SCALE	1:1
CHECKED		DATE		 SenRing Electronics			
PROJ.		REV.	A / 0				